
Właściwości



- Specially designed to be installed on doors of industrial cold stores and freezers with big temperature differences.
- The Twin Kool air curtain system has been designed to offer a versatile solution for any type of cold room. It has two jets of opposing air chambers that create additional space between the chamber and the pre-chamber. Thanks to the double barrier, this model becomes the perfect alternative to the TRIOJET SYSTEM air curtain when space is limited or this model is not an option.
- Samonośna konstrukcja obudowy wykonana z ocynkowanej blachy stalowej, wykończone strukturalnie farbą epoksydowo-poliestrową w kolorze białym RAL9016 w standardzie.Inne kolory lub stal nierdzewna są dostępne na życzenie.
- Duża fasetowana kratka wlotowa zapobiegająca intensywnej konserwacji.
- Anodowane aluminiowe łopatki wylotowe, kształt płata, regulowany od 0 do 15º z każdej strony.
- Dwukrotnie wlotowe wentylatory odśrodkowe napędzane przez zewnętrzny silnik wirnika i niski poziom hałasu. Selektor 5-biegowy.Modele EC zmontowane z wentylatorami o bardzo niskiej wydajności.
- Typ "A" bez ogrzewania, tylko powietrze.
- Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 7m and remote control. With integrated functions: door delay (configurable); interface mode; operation, alarm and maintenance warning signals; and multiple digital inputs that modify the air curtain's operation.
- Includes protective varnish for the electronic board and control.
- Optional:
  • Auxiliary temperature sensors that improve air curtain control and increase energy savings.
  • Clever PRO intelligent control (automatic, programmable, ModBus via PLC, timer, etc.) with an additional temperature sensor.
- Includes varnishing on the PCB to protect it from corrosion.

Specyfikacja


50Hz

Model	Nieogrzewane	
	Nominalny przepływ powietrza (m³/h)	Zalecana wysokość montażu (m)
TWIN KECG 3000 A	14400	9,8-13,8
TWIN KM 1500 A	5400	9,8-13,1
TWIN KM 2000 A	7200	9,8-13,1
TWIN KM 2500 A	9000	9,8-13,1
TWIN KM 3000 A	10800	9,8-13,1
TWIN KECM 1500 A	5520	9,8-13,8
TWIN KECM 2000 A	7360	9,8-13,8
TWIN KECM 2500 A	9200	9,8-13,8
TWIN KECM 3000 A	11040	9,8-13,8
TWIN KG 1500 A	6400	9,8-13,1
TWIN KG 2000 A	9600	9,8-13,1
TWIN KG 2500 A	11200	9,8-13,1
TWIN KG 3000 A	12800	9,8-13,1
TWIN KECG 1500 A	7200	9,8-13,8
TWIN KECG 2000 A	10800	9,8-13,8
TWIN KECG 2500 A	12600	9,8-13,8

60Hz

Model	Nieogrzewane	
	Nominalny przepływ powietrza (m³/h)	Zalecana wysokość montażu (m)
TWIN KECM 1500 A	5520	9,8-13,8
TWIN KECM 2000 A	7360	9,8-13,8
TWIN KECM 2500 A	9200	9,8-13,8
TWIN KECM 3000 A	11040	9,8-13,8

Wymiary

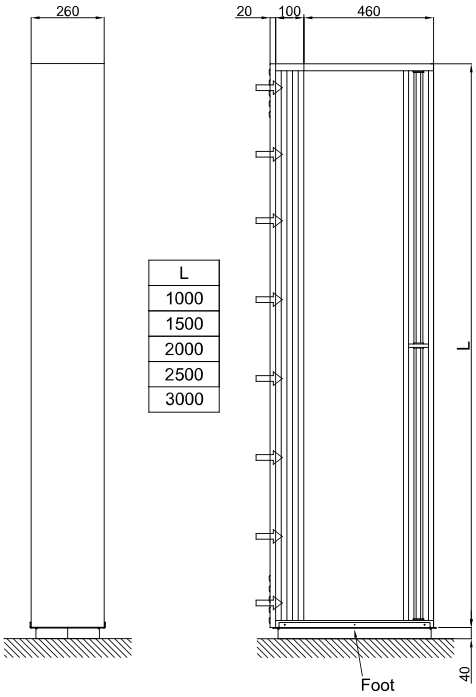

L
1000
1500
2000
2500
3000



